



SPECIFICATION SHEET

3BDMA, 4BDMA, 3BDFA & 4BDFA

METAL-FAB BIOMASS CHIMNEY ADAPTERS



Listing No. MH16402
Tested to UL 641

The 3BDMA and 4BDMA adapter is used to join Metal-Fab Biomass Chimney to Duravent Pellet Pro Chimney. These adapters mate the male end of the 3" and 4" diameter Duravent Pellet Pro to the female end of the Metal-Fab Biomass adapter. Insert the male end of the Duravent Pellet Pro Chimney into the female end of the Metal-Fab adapter. Secure by using sheet metal screws into the holes provided at the female end of the adapter seen in figure 1. 3" and 4" Metal-Fab Biomass Chimney can be used by twist-locking the male end of the adapter.

3BDMA & 4BDMA ASSEMBLY

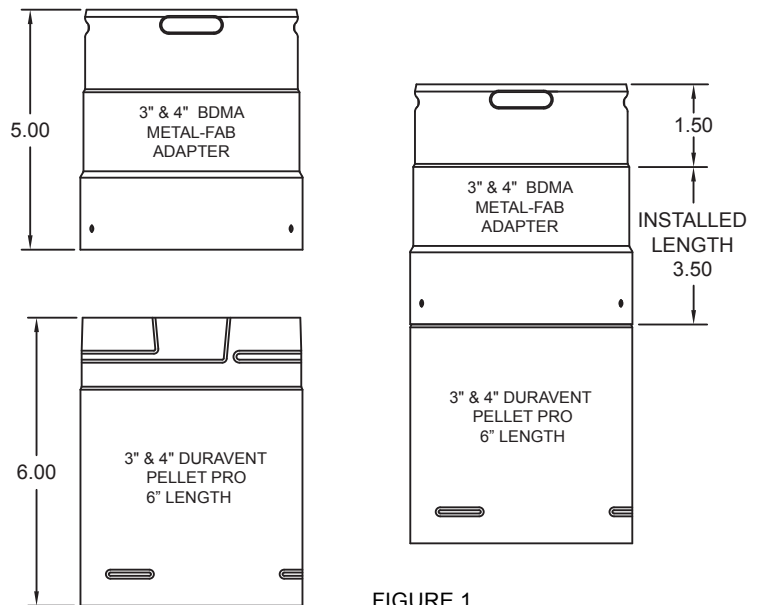


FIGURE 1

3BDFA & 4BDFA ASSEMBLY

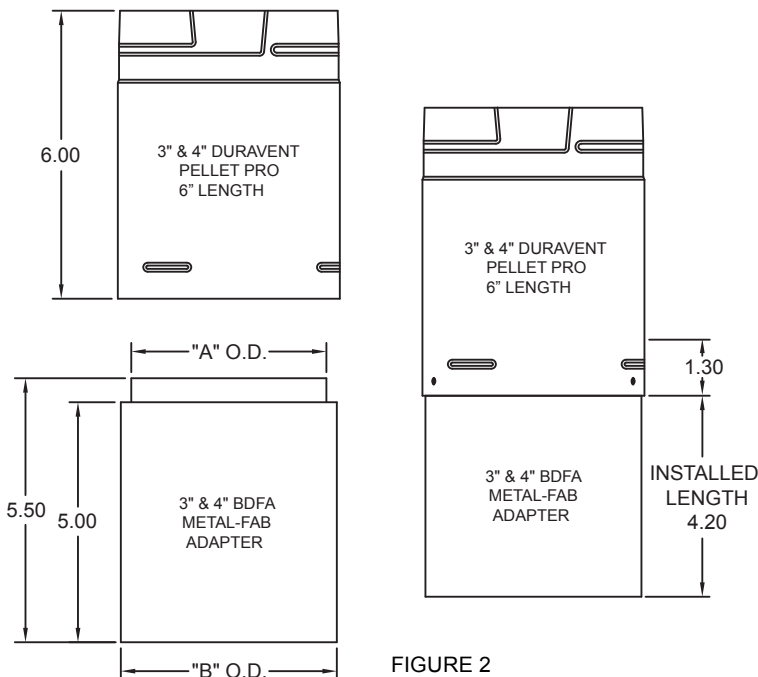


FIGURE 2

The 3BDFA and 4BDFA adapter is used to join Metal-Fab Biomass Chimney to Duravent Pellet Pro Chimney. These adapters mate the female end of the 3" and 4" diameter Duravent Pellet Pro to the male end of the Metal-Fab Biomass adapter. Insert the male end of the Metal-Fab adapter into the female end of the Duravent Pellet Pro Chimney. Secure by using 3 sheet metal screws. The screws will need to be equally spaced around the circumference of the chimney and located approximately 1/4" from the bottom of the female end. See installation instructions (L2779) for assembly of Premium Biomass Chimney